


LS-36™ INSULATED METAL ROOF AND WALL PANEL

METL-SPAN® INSULATED METAL PANELS



The versatility of **Metl-Span's LS-36™ insulated metal roof and wall panel** offers a multitude of design options. The overlapping, through fastened joint allows for quick installation in roof or wall applications that results in reduced labor costs and earlier business starts. Owners will also appreciate the energy cost savings that an insulated metal panel provides.

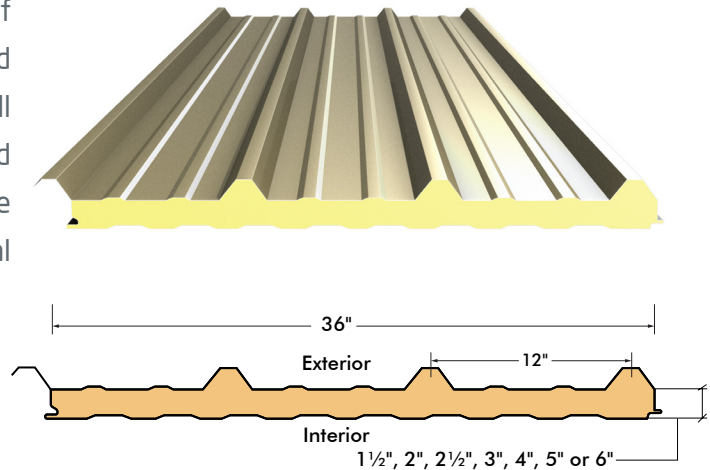

LS-36™ INSULATED METAL ROOF AND WALL PANEL FEATURES

Exterior Profile: 1 1/4" high major ribs at 12" o.c. with Mesas in between ribs at 4" o.c.

Interior Profile: Mesa nominal 1/8" deep

Panel Core: Foamed-in-place, non-CFC, zero ozone depleting (zero ODP) polyisocyanurate, Factory Mutual Class 1 approval

Thermal Values: K-factor, Btu in/ft² hr. °F @ 40°F (4°C) mean core temperature = 0.126

Module Width: 36"

Panel Thickness: 1 1/2", 2", 2 1/2", 3", 4", 5", 6"

Panel Lengths: 8'-0" to 50'-0"

Exterior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga. and 22 Ga.

Interior Facings: Stucco embossed, G-90 galvanized and/or AZ-50 aluminum-zinc coated steel in 26 Ga., 24 Ga. and 22 Ga.

Panel Joint: Overlapping with a single tongue and groove

Fastening: Exposed through fasteners

Minimum Slope: 1/2:12

FM 4880 Approved Class 1

FINISHES & COLORS

A full range of exterior colors & coatings are available for the architectural market. For specific information about our available colors and coatings, visit us online for a comprehensive selection.

METL-SPAN: Pioneering Insulated Metal Panel Technology

1720 Lakepointe Drive, Suite #101, Lewisville, Texas 75057 • 877.585.9969 • FAX: 972.420.9382

metlspan.com • Visit our website or call us today for a free architectural catalog and CAD CD-ROM.

© 2013 Metl-Span a division of NCI Group, Inc. - All rights reserved. Printed in the U.S.A.